
Portals Connect

Product Overview


Meet Portals Connect - a private space designed to enhance, and optimize the video call experience. Users have full flexibility to personalize every aspect of their environment, including appearance on screen with adjustable spotlights and bias lighting, as well as ventilation and airflow control. An independently adjustable deluxe desk and monitor enable optimal configuration for the most ergonomic video call experience, prioritizing user comfort and confidence. Portals Connect offers plug-and-play functionality with integrated power, charging and screen-bracket for your own tech. Available in a wide range of exterior and interior finishes, it also features step-free access to support greater accessibility.

Dimensions


471/4"w x 71"d x 88"/94"h (inches) Table Height Range: 24"-46"




General Drawing

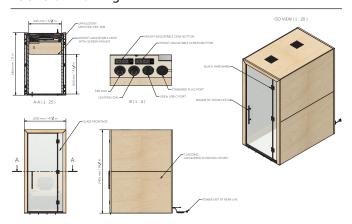

Desk & Screen Drawings





Environmental Summary

During the development journey we always kept our environmental impact in mind. This is demonstrated in the following key features of the design when the pod is purchased with the recommended finishes:

- All materials used are LBC 3.1 Red List Compliant, an extremely stringent standard
- Patented PVC-free acoustic door seal
- Product lifecycle the products are designed to be modular and reconfigurable to cater for future needs without wastage and using more resources.
- Power usage the products are designed with minimum idle power usage, with a PIR movement sensor to switch off the lighting after a period of non-use.
- FSC certified lumber.

Environmental Document & Declare Label



Electrics

Lighting & Power

Low Voltage LED Lighting for consistent illumination is supplied on a PIR system with movement sensor.

- Spotlights included as standard
- · Power module included as standard
- Plug-and-play, one standard 13A socket needed
- 2 year warranty on electrical parts
- Diffuse lighting behind monitor with dimmer for user adjustment for best lighting level

Ventilation

User adjustable ventilation. Ceiling mounted fan ventilates unit with ambient building air.

TECHNICAL DATA

Spacestor.

Portals Connect

LED Tape:

сер таре.	
Length	850mm
Voltage	24V
Watts p/M	21W p/M
No. of LEDs p/M	120 LEDs
Colour	Neutral White
Colour Temperature	4000K
IP Rating	IP20
Lumens p/M	2460LM
Lumens p/W	117LM
LED Chip Type	2835 SAN AN
LED Chip Size	2.8mm x 3.5mm
Beam Angle	1200
CRI	>80
PCB Width	10mm
PCB Thickness	1.2mm
Cut Points	Every 5cm
Operating Temp	- 40°C to + 40°C
Average Lifespan	Up to 25000 Hours
Certification	CE-EMC CE-LVD RoHs
Guarantee	3 Years




Semi-Clear Diffuser:

Alters the Kelvin Temperature of the LED Tape by approximately 10% - CCT will appear cooler




Location of Parts in Assembly:



24V LED Tape

Semi-Clear Diffuser


Deluxe VC Height Adjustable Table Schematic



Safety

Sprinklers

To address the need for any required fire sprinkler regulations, this product can accept a sprinkler head drop from the building fire sprinkler system via a cut out, managed per project with the Project Manager. A flexible fire sprinkler drop is recommended.



Fire Ratings

- Upholstery fabric selected from approved contract quality fabric ranges, minimum Matindale test of 45,000 rubs and tested to Crib 5 or C&M
- Fabric & foam supplied complies with BS 7176: Firest test to non-domestic seating Standard Brief.
- BS 7176 specified requirements for the resistance to ignition
 of upholstered furniture used for seating when tested in
 accordance with BS 5852, BS EN 1021-1 or BS EN 1021-2, as
 appropriate. The levels of ignition resistance have been set
 after careful consideration of the fire risk of the particular enduse environment involved.

Lifting

Product must be handled by 2 operatives.

General safety

- All maintenance and repair tasks must be performed by appropriately qualified and authorised technicians.
- Only use tools that are appropriate for these tasks.
- For longer periods of absence or if there is a thunderstorm, unplug the power supply cable from the power outlet to avoid damage due to grid-related over-voltage.

TECHNICAL DATA

Portals Connect

Spacestor.

Structural

Adjustable levellers on the product have up to 13/16" / 20mm tolerance.

Seismic

To address the need for any required seismic regulations, this product can be fitted with brackets, managed per project with the Project Manager.

Acoustics

Rating

The acoustic performance was optimised during the design process to achieve speech intelligibility privacy by using high acoustic performance materials.

'Acoustic performance' of a pod is the noise reduction level (sound from inside to outside/outside to inside). Noise reduction level is affected by external factors - e.g. the environment, external noise level, how close the pod is to a wall etc.

The materials used in the products have noise absorbing properties ranging from 30 to 60+ db rating but this is not representative of the product as a whole.

We have designed our products in such a way to block sound transfer but there are other factors such as the building sub-floor etc. that affect the noise reduction level.

Shipping

Shipping dims/weight/packaging are dependant per project - please enquire.